



焊接鋼槽壁或鋼構壁面導6C

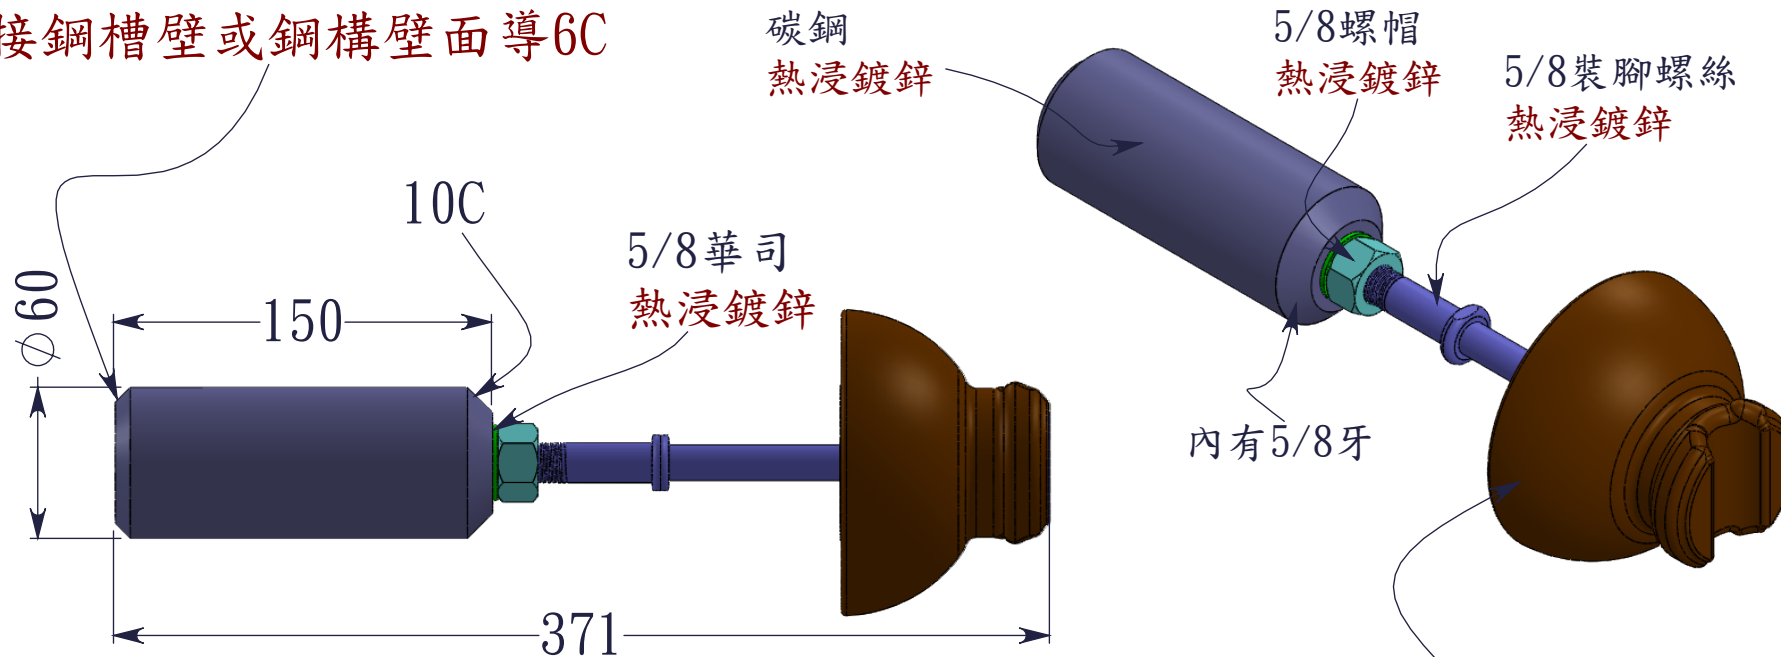

MINH LONG P. TECHNICAL CERAMIC CO., LTD.

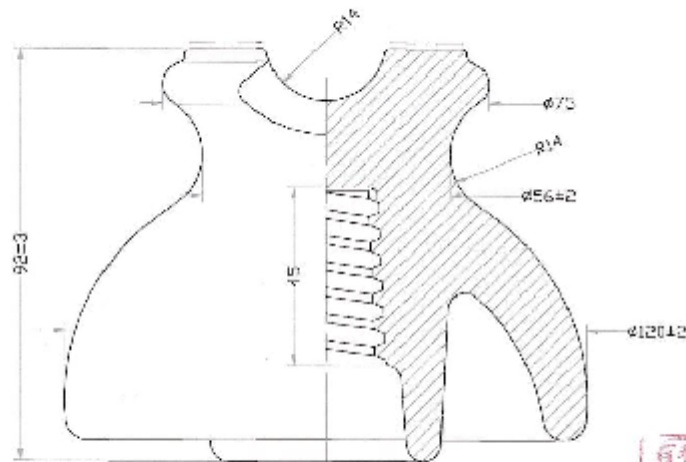

13.2KV PIN TYPE INSULATOR

Technical Specification:

1. Glaze color: Brown
2. No defect after firing.
3. Minimum creepage distance: 158 mm.
4. — : unglazed
5. Power frequency withstand voltage :
+ Dry (1 minute) : 36 kV
+ Wet (1 minute) : 26 kV
6. Impulse withstand voltage : 60 kV
7. Minimum puncture voltage : 65 kV
8. Mechanical falling load : 12.2 KN

Ngày ban hành: Issued Date: JUN 20, 2008	Ngày vẽ: Drawing Date: MAR 24, 2000	Bản vẽ số: Drawing No.: PTBND-11
Bản số: Drawing No.: 03	Sản phẩm: SỢ ĐỒNG 13.2KV Product: 13.2KV PIN TYPE INSULATOR	Chất liệu: Material: CERAMIC
Tỷ lệ: Scale: 1 : 1	Kiểm tra: Checked by:	Người vẽ: Drawn: BAO THANH

13.2KV絕緣礙子
高93-φ120

工程名稱：

工程位置：

工程業主：

設計單位：

自然電科技
股份有限公司

監造單位：

執行單位：

設計主管：黃銘勳

機構主管：

結構主管：

審核主管：

驗收主管：

發包日期：

完工日期：

驗收日期：

設計圖為自然電公司版權

圖面名稱：Φ60*150長鐵棒熱浸鍍鋅+裝腳浸鍍鋅+礙子

材質：鐵棒+熱浸鍍鋅

單位：mm mm